


**TO ORDER CALL: +61 8 8260 2277 OR
CONTACT YOUR LOCAL MANUTEC DEALER**

WHEEL & TYRE OPTIONS 15", 16" & 18" WHEELS

15" & 18" SEMI-SOLID TYRE PROFILES	15" SOLID TYRE PROFILES	15" S/P TYRE PROFILES	16" SOLID & S/P TYRE PROFILES	18" SOLID & S/P TYRE PROFILES
---	--	--	--	--

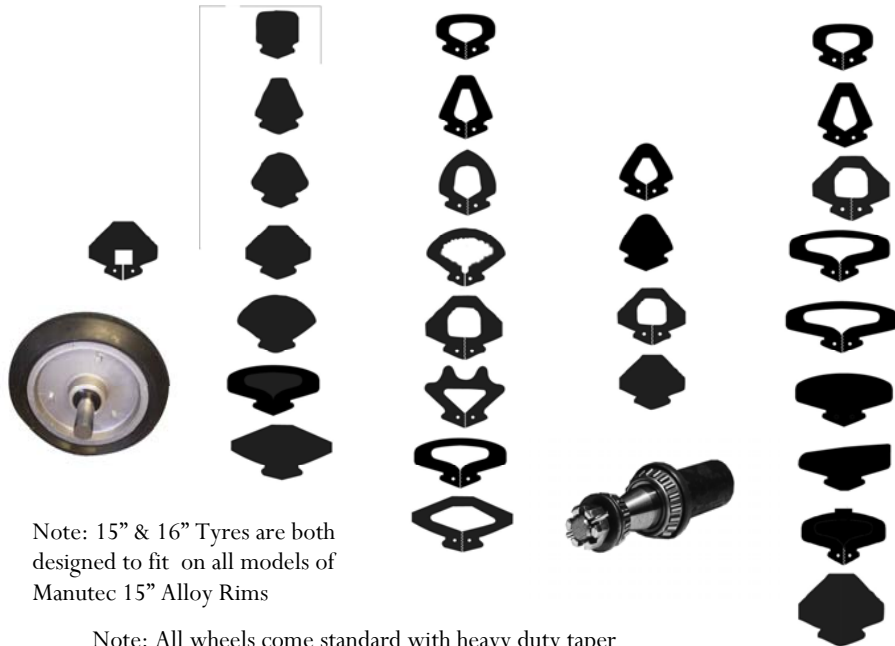

Note: 15" & 16" Tyres are both designed to fit on all models of Manutec 15" Alloy Rims

Note: All wheels come standard with heavy duty taper bearings and triple marine seal.

Important Note:

- Choose tyres carefully, seek local advice and if unsure always contact Manutec for advice. Generally with tyne mounts we recommend semi-pneumatic tyres.



**AGRICULTURAL EQUIPMENT
PRESS WHEELS**



TYNE MOUNTED ASSEMBLIES

For more detailed information and pricing, visit our website.
www.manutec.com.au

Tyne Mounted Assemblies

Manutec Tyne Mounted Assemblies come standard with Integral Hub Press Wheels. Available in fixed, adjustable and semi-adjustable variants. The semi-adjustable variant has been specifically designed to allow for double shooting.

Available in variants to suit straight edge on tynes or curved flat on tynes.

For other tyne variants, call for advice on suitability. When ordering specify Tyne type and dimensions.

- Press Wheels Assemblies
- Tyne Mounts
- Walking Wheels
- Extension Arms
- Gangs
- In-Frame
- Seed Tubes
- Packer Wheels
- Coulters
- Ag Bearings
- Ag Seals
- Tyres
- Springs
- U-Bolts
- Harrows
- Swivel Arms
- Bar Mounts
- Spare Parts
- Wheels
- Wheel Centres
- Axles
- Overcaps
- Seal Guards
- Hubs
- Stubs
- Quick Release
- Rocker Arms
- Adjustable Arms
- Fixed Arms
- Integral Hubs
- Discs
- Gauge Wheels
- Planter Wheels
- Custom Wheels
- Adjustable Stands
- Adjustable Legs
- Parallelograms
- Brackets
- DIY
- R&D
- Accessories

TYNE MOUNTED PRESS WHEELS



Tyne Mounted Assemblies

Tyne mounted press wheel assemblies are available in three variants, fixed, adjustable and semi-adjustable. The fixed variant is only suitable for use on standard “C” shank flat on tynes such as used on Flexicoil machines. The adjustable and semi-adjustable tyne mounted assemblies can be used on either curved or edge on tynes. The adjustable tyne mount has greater adjustability and is generally used for single shooting. The semi-adjustable tyne mount is specifically designed for double shooting as it has a longer throat to allow for two oversize tubes to be fitted. The edge on variants attach using a bracket with bolts that draw in across the back of the tyne. The flat on variants attach using U-Bolts.

Tyne mounts are not recommended on machines where break out is an issue, or in areas of high trash.

MANUTEC

FOR THE FULL RANGE OF MANUTEC PRODUCTS VISIT www.manutec.com.au

**TO ORDER CALL: +61 8 8260 2277 OR
CONTACT YOUR LOCAL MANUTEC DEALER**



Adjustable Tyne Mounted Assembly (C-Tyne)

Fully Adjustable , two adjustment points, ideal for non-standard C-tyne set-up, 15” , 16” or 18” Wheels

Code: 15PWFOTYNEADJ+

Includes 2 U-bolts

Code: 18PWFOTYNEADJ+

Colour: Grey

Specify Tyne type and dimensions when ordering, replace + with tyre code



Adjustable Tyne Mounted Assembly (Edge Tyne)

Fully Adjustable, two adjustment points, ideal for non standard edge on tyne set-up, 15” ,16” or 18” Wheels

Code: 15PWEOTYNEADJ+

Code: 18PWEOTYNEADJ+

Colour: Grey

Specify Tyne type and dimensions when ordering, replace + with tyre



Fixed Tyne Mounted Assembly (C-Tyne)

Non adjustable ideal for standard C-Tyne set-up, 15” or 16” wheels recommended. Wide throat design.

Code: 15PWFIXTYNE+

Includes 2 U-bolts

Code: 18PWFIXTYNE+

Colour: Red

Specify Tyne type and dimensions when ordering, replace + with tyre



Semi-Adjustable Tyne Mounted Assembly

Ideal for standard tynes where some pressure adjustment is required. Incorporates wider throat for large pipes and double shooting. Models to suit edge on and flat on tynes.

Code: 15PWSADJTYNE+

Includes 2 U-bolts

Code: 18PWSADJTYNE+

Colour: Grey

Specify Tyne type and dimensions when ordering, replace + with tyre